


## API Roll-Forged™ Sheaves

McKissick® Products has been licensed by the American Petroleum Institute to manufacture *Roll-Forged™* sheaves under API specifications 8C.

- ✓ Sheave diameter range  
— 762mm thru 1981mm (30" thru 78")
- ✓ Wire line size range  
— 25mm thru 64mm (1" thru 2-1/2")
- ✓ Sheaves provided with plain bore, and available for use with Tapered Roller Bearings.
- ✓ Grooves are flame hardened to min. RC35.
- ✓ API sheaves must meet the criteria established by the American Petroleum Institute for drilling and production hoisting equipment.
- ✓ The wire line grooves in all McKissick® Roll-Forged™ sheaves are produced to API Specifications.



**TYPICAL  
API SHEAVE  
RIM PROFILE**

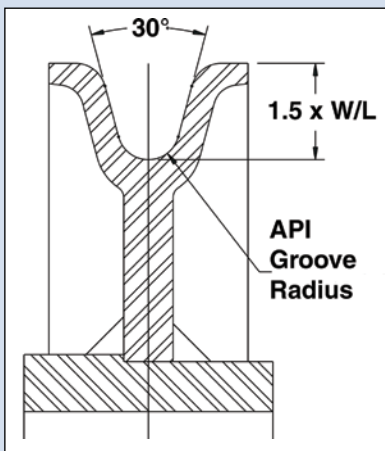

Licensed Under  
API Spec 8A-0023  
and 8C-0021

Sheave O.D.	Wire Line Size	Hub Bore
762mm 30"	25mm 1.00"	165,05mm 6.498"
	28mm 1.125"	165,05mm 6.498"
914mm 36"	28mm 1.125"	225,35mm 8.873"
1067mm 42"	28mm 1.125"	225,35mm 8.873"
	32mm 1.25"	225,35mm 8.873"
	32mm 1.25"	276,15mm 10.873"
	35mm 1.375"	347,70mm 13.686"

Sheave O.D.	Wire Line Size	Hub Bore
1397mm 55"	32mm 1.25"	347,60mm 13.686"
	32mm 1.25"	276,15mm 10.873"
1524mm 60"	35mm 1.375"	347,55mm 13.686"
	38mm 1.50"	347,55mm 13.686"
	35mm 1.375"	352,35mm 13.873"
	38mm 1.50"	352,35mm 13.873"
	44mm 1.75"	394mm 15.498"
1829mm 72"	64mm 2.50"	422mm 16.620"

**Crosby®**  
Europe

**BELGIUM**  
Industriepark Zone B n°26  
2220 Heist-op-den-Berg

P: (+32)(0)15 75 71 25  
F: (+32)(0)15 75 37 64  
sales@crosbyeurope.com

**FRANCE**  
21, rue du Petit Albi  
Parc d'Affaires Silic  
95800 Cergy - St. Christophe  
P: (+33)(0)1 34 201 180  
F: (+33)(0)1 34 201 188  
sales@crosbyeurope.fr

**UNITED KINGDOM**  
Station Street  
Cradley Heath  
West Midlands B64 6AJ  
P: (+44) (0)1226 290 516  
F: (+44) (0)1226 240 118  
sales@crosbyeurope.co.uk